



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

B67D 3/00, B65D 47/38

A1

(11) International Publication Number:

WO 98/03426

(43) International Publication Date:

29 January 1998 (29.01.98)

(21) International Application Number: PCT/CA97/00392

(22) International Filing Date: 5 June 1997 (05.06.97)

(30) Priority Data:

2,181,828

22 July 1996 (22.07.96)

CA

(60) Parent Application or Grant

(63) Related by Continuation

US

Filed on

08/684,994 (CIP)

22 July 1996 (22.07.96)

(71) Applicant (for all designated States except US): CREALISE  
PACKAGING INC. [CA/CA]; 3581, Albert, Rawdon,  
Québec J0K 1S0 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LAMOUREUX, Richard  
[CA/CA]; 1570, place Kirouac, Laval, Québec H7G 4X5  
(CA).(74) Agent: ORLHAC, Thierry; Robic, 55, Saint-Jacques, Montreal,  
Québec H2Y 3X2 (CA).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,  
BY, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU,  
IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,  
LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO,  
RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US,  
UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TN),  
European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB,  
GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ,  
CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

*With international search report.**Before the expiration of the time limit for amending the  
claims and to be republished in the event of the receipt of  
amendments.*

(54) Title: ONE-PIECE CAP FOR LIQUID DISPENSER CONTAINER

(57) Abstract

A one-piece cap (10) for closing a liquid container to be installed for supply purpose in upside down position onto a liquid dispenser. Such container has a neck (14) on which the cap is sealingly mounted and through which a liquid supply tube (70) passes when the container is installed onto the dispenser. The cap comprises a lid (30) having a surface area substantially identical to the one of the neck (14), and a skirt (50) integrally projecting from the lid. The lid is provided with a central recess (32) including a tubular guiding portion (34) projecting from the lid in the same direction as the skirt (50). The guiding portion is sized and positioned to receive the supply tube (70). The central recess also includes a bottom portion that is in the form of a cone (36) that projects from the guiding portion and is provided with a number of frangible lines (38) extending within meridian planes in such a manner so as to allow splitting of the cone into a corresponding number of petal-shaped segments when the container is installed onto the dispenser and its cap and neck are penetrated by the supply tube. This cap is useful in that it may be used in any kind of water dispenser.

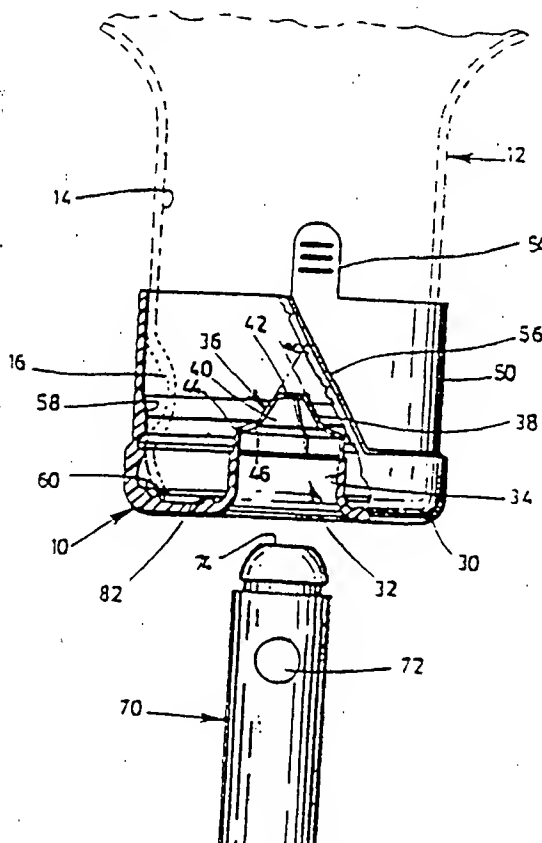

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B67D 3/00, B65D 47/38</b>		A1	(11) International Publication Number: <b>WO 98/03426</b>
			(43) International Publication Date: 29 January 1998 (29.01.98)
(21) International Application Number: PCT/CA97/00392 (22) International Filing Date: 5 June 1997 (05.06.97) (30) Priority Data: 2,181,828 22 July 1996 (22.07.96) CA (60) Parent Application or Grant (63) Related by Continuation US 08/684,994 (CIP) Filed on 22 July 1996 (22.07.96) (71) Applicant (for all designated States except US): CREALISE PACKAGING INC. [CA/CA]; 3581, Albert, Rawdon, Québec J0K 1S0 (CA). (72) Inventor; and (75) Inventor/Applicant (for US only): LAMOUREUX, Richard [CA/CA]; 1570, place Kirouac, Laval, Québec H7G 4X5 (CA). (74) Agent: ORLHAC, Thierry; Robic, 55, Saint-Jacques, Montreal, Québec H2Y 3X2 (CA).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: ONE-PIECE CAP FOR LIQUID DISPENSER CONTAINER

(57) Abstract

A one-piece cap (10) for closing a liquid container to be installed for supply purpose in upside down position onto a liquid dispenser. Such container has a neck (14) on which the cap is sealingly mounted and through which a liquid supply tube (70) passes when the container is installed onto the dispenser. The cap comprises a lid (30) having a surface area substantially identical to the one of the neck (14), and a skirt (50) integrally projecting from the lid. The lid is provided with a central recess (32) including a tubular guiding portion (34) projecting from the lid in the same direction as the skirt (50). The guiding portion is sized and positioned to receive the supply tube (70). The central recess also includes a bottom portion that is in the form of a cone (36) that projects from the guiding portion and is provided with a number of frangible lines (38) extending within meridian planes in such a manner so as to allow splitting of the cone into a corresponding number of petal-shaped segments when the container is installed onto the dispenser and its cap and neck are penetrated by the supply tube. This cap is useful in that it may be used in any kind of water dispenser.

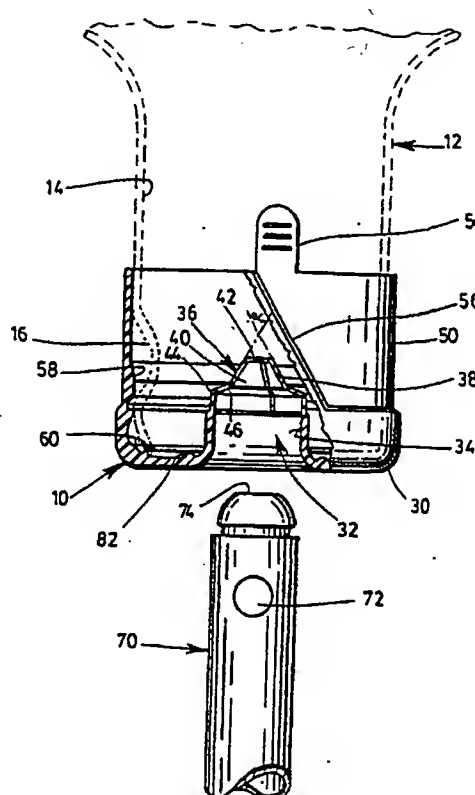

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## ONE-PIECE CAP FOR LIQUID DISPENSER CONTAINER

5

### FIELD OF THE INVENTION

The present invention relates to a one-piece cap for closing a liquid container of the type to be installed for supply purpose in upside down position onto a liquid dispenser. More particularly, it relates to a cap for use to seal the neck of a water bottle used as a water source on a standard water dispenser or water cooler.

### BACKGROUND OF THE INVENTION

15

Water dispensers or water coolers are well known devices that are used as a clean and safe source of drinkable water. Such devices usually comprise a housing including an internal water reservoir operatively connected to an external dispensing faucet. A supporting platform provided with a central opening extends on top of the water reservoir. This platform is devised to receive and support a water bottle in an inverted position, with the neck of the bottle neck projecting downwardly through the central opening into a dispenser insert in liquid communication with the underlying reservoir so as to allow water to flow down by gravity into the reservoir and refill the same as soon as the faucet is operated.

In order to avoid spilling of water during loading onto the dispenser of a water which may usually have a volume of 5-gallons (18 liters), it has been of common practice for a long time to close the neck of the water bottle with a cap having a central recess provided with a flat bottom intended to be pierced by a hollow spike projecting centrally and upwardly within the dispenser insert. With such a hollow spike in which the water may flow down from the water bottle into the water reservoir, it is no more necessary to remove the cap before installation of the bottle, thereby making

such installation much easier and cleaner. Examples of caps of this type are disclosed in the following patents:

US-A-4,699,188 (Baker et al)

US-A-4,846,236 (Deruntz)

5 US-A-5,123,555 (Luch et al)

More recently, it has been suggested that, instead of using a perforating spike, use be made of a supply tube having a smooth tip sized and shaped to engage the central recess of the cap and cause the bottom of the same, which is formed as a plug, not only to be pushed, removed or torn out  
10 but also to snap onto the tip of the tube and thus be retained by the same.

According to a first variant, the plug is separate from the cap and devised to be slid by the tube within the central recess in order to free openings allowing water to flow down. See, by way of examples, the following patents:

15 US-A-4,874,023 (Ulm)

US-A-4,991,635 (Ulm)

According to a second variant, the plug is devised to be removed from the central recess and the smooth tip of the tube is provided with a circular recess on which the plug may snap as soon as it leaves the recess.  
20 See, by way of examples, the inventions disclosed in the following patents:

US-A-5,370,270 (Adams et al)

US-A-5,392,939 (Hidding)

According to a third variant, the plug forms an integral part of the central recess. In use, it is torn out from the recess by the pressure applied by  
25 the tube, once the bottle is positioned on it. To facilitate such tearing, a circular frangible line is provided on the periphery of the bottom of the recess. An inwardly projecting bead is also provided on the plug to caused the same snap in a corresponding groove provided on the tip of the tube. See, by way of example, the invention disclosed in the following patents:

30 US-A-5,222,530 (Baker et al)

US-A-5,273,083 (Burrows)

US-A-5,284,188 (Baker et al)

US-A-5,413,152 (Burrows)

## US-A-5,464,127 (Burrows)

As it can be understood, snapping of the plug onto the supply tube is interesting in that it prevents the plug from floating at the surface of the water bottle and thus be visible to by potential users, as the bottles are usually made from transparent plastic material.

As aforesaid, the water dispensers that are presently used, are of two kinds, each associated with a type of cap. The problem is that water dispensers provided with a spike cannot be used efficiently with water bottles having a cap with a plug. Similarly, water dispensers having a supply tube with a smooth tip cannot be used efficiently with bottles having a cap with a central recess whose flat bottom is intended to be pierced. Therefore, even if the prior art devices are useful in some ways, there is a need of a cap for closing a water dispenser bottle or container, which would be easy to manufacture and versatile enough to be used on any one of the above mentioned kinds of water dispensers.

**SUMMARY OF THE INVENTION**

The object of the invention to provide a one-piece cap for closing a liquid container (or "bottle") of the type intended to be installed for supply purpose in upside down position onto any kind of liquid dispenser, such container having a neck on which the cap is sealingly mounted and through which a liquid supply tube passes when the container is installed onto the dispenser.

This cap comprises a lid having a surface area substantially identical to the one of the neck. It also comprises a skirt integrally projecting from the lid portion. The skirt has an internal face on which gripping means are provided for sealing the liquid container neck. The lid is provided with a central recess including a tubular guiding portion projecting from the lid in the same direction as the skirt. This guiding portion is sized and positioned to receive the supply tube. The central recess of the lid also includes a bottom portion.

In accordance with the invention, this one-piece cap of conventional structure is improved in that the bottom portion of its central

recess is in the form of a cone that projects away from the guiding portion and which is provided with a number of frangible lines extending within meridian planes in such a manner so as to allow splitting of the cone into a corresponding number of petal-shaped segments each provided with a tip  
5 when the container is installed onto the dispenser and its cap and neck are penetrated by the supply tube.

Advantageously, the cap is made of a plastic material and the cone has a thickness smaller than the average thickness of the guiding portion and lid.

10 The cone forming the bottom portion of the cap preferably comprises three equally spaced apart frangible lines. However, it may comprise more than three frangible lines, if desired. Preferably also, the cone has a truncated top and a peripheral surface forming an annular, outwardly projecting step of V-shaped cross-section that is adjacent to the guiding portion and  
15 defines an annular inner flange. When the cone is splitted, this flange comes into contact with the supply tube and causes the tips of the segments to extend at a short distance away from the tube, thereby preventing any interference with the same during removal of the bottle.

The apex of the cone may range from 30 to 120°. More  
20 preferably, this apex is equal to about 60°.

The cap may also comprise an integral pull tab located adjacent to another frangible line extending across part of the skirt portion in order to allow easy removal of the cap from the neck of the container after use.

The cap according to the invention can be used in any kind of  
25 liquid dispenser or liquid cooler, whatever be the shape of their liquid supply tubes. This cap is not only efficient but also inexpensive to fabricate.

Other objects, features and advantages of the present invention will be apparent from the following non-restrictive description of a preferred embodiment of the invention, made with reference to the accompanying  
30 drawings.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is a side elevational view, partly in cross-section, showing the neck of a water container provided with a cap according to the invention, prior to its penetration by the water supply tube of a water dispenser or water cooler device;

Fig. 2 is a view similar to the one of Fig. 1, showing the supply tube engaged within the guiding portion of the central recess of the cap;

Fig. 3 is a view similar to the one of Fig. 1, showing the supply tube splitting the cone-shaped bottom portion of cap;

Fig. 4 is a view similar to the one of Fig. 1, showing the supply tube fully engaged within the bottle neck;

Fig. 5 is a fragmentary perspective view of the central recess of the cap shown in Fig. 1;

Fig. 6 is a fragmentary perspective view similar to the one of Fig. 5, showing the supply tube fully engaged through the central recess of the cap, as is shown in side elevation in Fig. 4; and

Fig. 7 is a bottom view of the cap shown in Fig. 1.

**DESCRIPTION OF A PREFERRED EMBODIMENT OF THE INVENTION**

Figs. 1 to 4 show the successive relative positions of the supply tube 70 of a liquid dispenser and the neck 14 of a liquid container 12 closed with a one-piece cap 10 according to the invention, while the container is installed in upside down position onto the dispenser.

The liquid container 12 is preferably a standard commercial water bottle.

The cap 10 which is sealingly mounted onto the neck 14 of the bottle comprises a lid 30 having a surface area substantially identical to the one of the neck 14. The cap also comprises a skirt 50 integrally projecting from the lid portion 30. The skirt 50 has an internal face on which gripping means are provided. These gripping means preferably comprise a tension ring 58 sized to fit within a recess 16 made in the bottle neck 14, and an upper



seal bead 60 which tightly engage the container neck and seal it against leakage.

The cap 10 preferably comprises also an integral pull tab 54 located adjacent to another frangible line 56 across part of the skirt 50 in order to allow easy removal of the cap 10 from the neck 14 of the container 12 after use, by pulling the tab 54.

The lid 30 is provided with a central recess 32 through which the liquid supply tube 70 passes when the container 12 is installed onto the dispenser. This central recess includes a tubular guiding portion 34 projecting from the lid 30 in the same direction as the skirt 50. The guiding portion 34 is sized and positioned to receive the supply tube 70. The size of this guiding portion must be sufficient to firmly maintain the supply tube 70 while not being subject to easy breakage. This size must also be sufficient to avoid water leak between the supply tube 70 and the tubular guiding portion 34 when the supply tube is splitting the cone-shaped bottom portion of the cap during the installation of the container onto a dispenser or cooler device as will be better described hereinafter (see Fig. 3). If desired, a circular sealing bead (not shown) may be formed onto the inner wall of the guiding portion 34 so as to contact the periphery of the supply tube 20 and prevent water leaks.

The supply tube 70 shown on Figs. 1 to 4 and 6 is an hollowed tube provided with a rounded tip or head 74 and with at least one hole 72 allowing water to flow down through the supply tube 70 into the reservoir of the dispenser. However, other types of supply tubes could be used similarly, like, for example, a spike.

As is better shown in Fig. 5, the central recess 32 also includes a bottom portion 36 which, in accordance with the invention, is in the form of a cone that projects from the guiding portion 34. This cone has an apex  $\alpha$  which may range from 30 to 120° and is preferably equal to 60° as is shown (see Fig. 1). The cone 36 is provided with a number of frangible lines 38 extending within meridian planes in such a manner so as to allow splitting of the cone into a corresponding number of petal-shaped segments 40 each with a top 41 when the container 12 is installed onto the dispenser and its cap 10 and neck 14 are penetrated by the supply tube 70. Advantageously, as shown

in Figs. 5 and 6, the frangible lines 38 are equally spaced apart and are preferably three in number. However, a number of more than three equally spaced frangible lines 38 could also be used if wanted.

In accordance with a preferred embodiment of the invention, the  
5 cone 36 has a truncated top 42 and a peripheral surface forming an annular, outwardly projecting step 44 of V-shaped cross-section that is adjacent to the guiding portion 34 and defines an annular inner flange (46) at a given distance from the top 42. In use, when the cone is splitted, the flange 46 comes into contact with the supply tube 70 and causes the tips 41 of the segments to  
10 extend at a short distance away from the tube 70 as is shown in Fig. 4.

During installation on a dispenser or cooler device, the container 12 is held in upside down position and the central recess 32 of the cap 10 is positioned in regard to the supply tube 70, as shown in Figure 1. The liquid container 12 is then lowered onto the dispenser. During such lowering, the  
15 supply tube 70 engages the tubular guiding portion 34 of the central recess 32 and contacts the bottom portion 36 thereof as shown in Fig. 2. Further lowering of the liquid container 12 to the position of Fig. 3 causes a breakage of the frangible lines 38 and a splitting of the cone into a plurality petal-shaped segments 40. Thanks to the shape of the bottom portion and the position of  
20 the frangible lines onto the same, the requested breakage is easily achieved even when the supply tube has a smooth tip. As the liquid container 12 is further lowered, as shown in Fig. 4, the hole 72 of the tube comes into contact with the liquid which then may flow down through the supply tube 70 into the reservoir of the dispenser. After the liquid has been dispensed, the  
25 user may remove the container 12 from the dispenser by reversing the operations shown in Figs. 1 to 4. Thanks to the step 44 and the flange 46 defined by the same, which comes into contact with the supply tube 70 and causes the tips 41 of the segments 40 to extend at a distance from the tube (see Fig. 4), there is no risk of interference and jamming of the segments 40  
30 with the hole and or head of the tube during removal of the bottle. After removal, the tab 54 may be gripped to tear the skirt 50 along the frangible line 56. Such allows the cap 10 to be removed from the liquid container 12 which may be recycled.

The one-piece tab 10 can be made of plastic material by moulding. Preferably, the mould is devised so that the cone 36 is of a smaller thickness than the guiding portion 34 and the lid 30. This gives additional flexibility to the petal-shaped segments 40.

5           As is better shown in Figs. 5 to 7, the moulding can be carried out by injecting the plastic material in the mould at an injection point 80 located in the lid portion of the mould. To make it sure that the cone portion of the mould be fully filled up eventhough it is of smaller thickness than the remaining portions of the same channels 82 and 84 can be provided in the lid  
10 and guiding portions of the mould to give full access to the plastic material injected through the point 80 to all the segments 40 of the cone. Once it is moulded, the cap can be mounted onto the neck 14 of a liquid container 12 by any known methods.

          While only one preferred embodiment of this invention has been  
15 shown and described, it would be apparent to those skilled in the art that modifications are possible without departing from the scope of the invention as defined in the appended claims.

CLAIMS

1. A one-piece cap (10) for closing a liquid container (12) of the type to be installed for supply purpose in upside down position onto a liquid dispenser, said container having a neck (14) on which said cap is sealingly mounted and through which a liquid supply tube (70) passes when the container is installed onto the dispenser, said cap comprising:

a lid (30) having a surface area substantially identical to the one of the neck (14); and

a skirt (50) integrally projecting from the lid;

said skirt (50) having an internal face on which gripping means (58, 60) are provided for sealing the neck of the liquid container.

said lid (30) being provided with a central recess (32) including a tubular guiding portion (34) projecting from the lid in the same direction as the skirt (50), said guiding portion (34) being sized and positioned to receive said supply tube (70), said central recess (32) also including a bottom portion (36),

characterized in that said bottom portion (36) is in the form of a cone that projects away from the guiding portion (34), said cone being provided with a number of frangible lines (38) extending within meridian planes in such a manner so as to allow splitting of said cone into a corresponding number of petal-shaped segments (40) each provided with a tip (41) when the container (12) is installed onto the dispenser and its cap (10) and neck (14) are penetrated by the supply tube (70).

25

2. The cap of claim 1, characterized in that the cone (36) has a truncated top (42) and a peripheral surface forming an annular, outwardly projecting step (44) of V-shaped cross-section that is adjacent to the guiding portion (34) and defines an annular inner flange (46) at a given distance from the top (42),

30

whereby, in use, when the cone is splitted, said flange (46) comes into contact with the supply tube (70) and causes the tips (41) of the segments (40) to extend at a short distance away from said tube (70).

3. The cap of claim 1 or 2, characterized in that it further  
comprise an integral pull tab (54) located adjacent to another frangible line (56)  
extending across part of the skirt (50) in order to allow easy removal of the  
5 cap (10) from the neck (14) of the container after use.



4. The cap of claim 1, 2 or 3, characterized in that the cone  
(36) forming the bottom portion of the recess comprises three equally spaced  
apart frangible lines (28).  
10

5. The cap of any one of claims 1 to 4, characterized in that  
the cone (36) has an apex ranging from 30 to 120°.

6. The cap of claim 5, characterized in that the apex of the  
15 cone (36) is equal to 60°.

7. The cap of any one of claims 1 to 6, characterized in that  
it is made of plastic material.

1 / 4

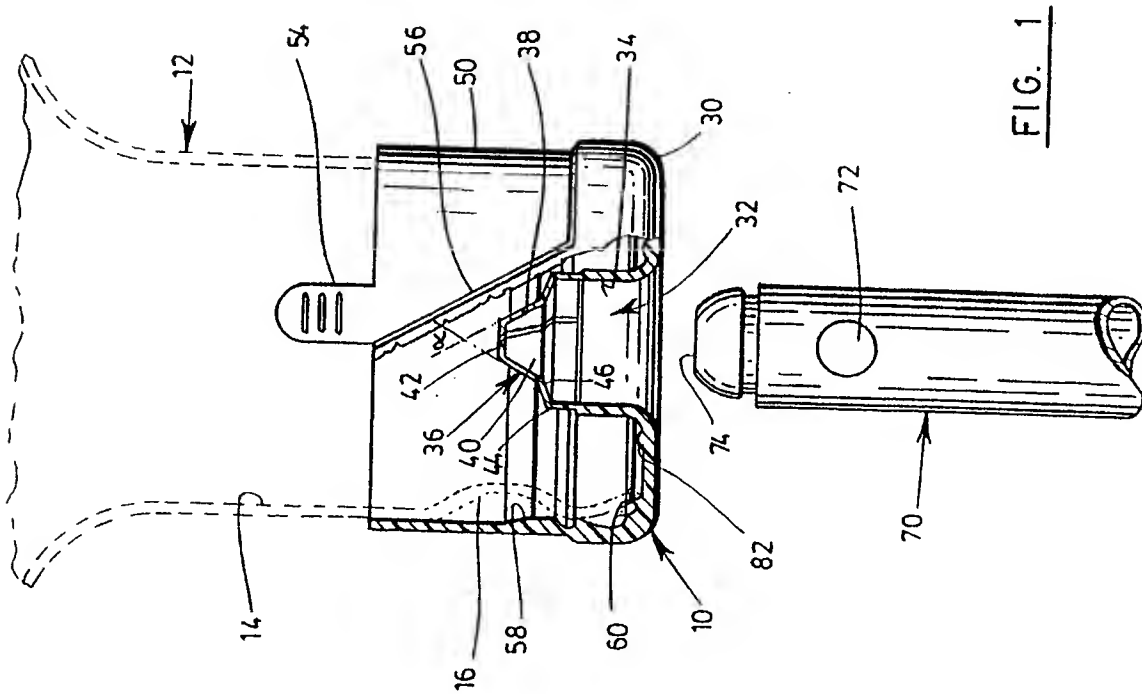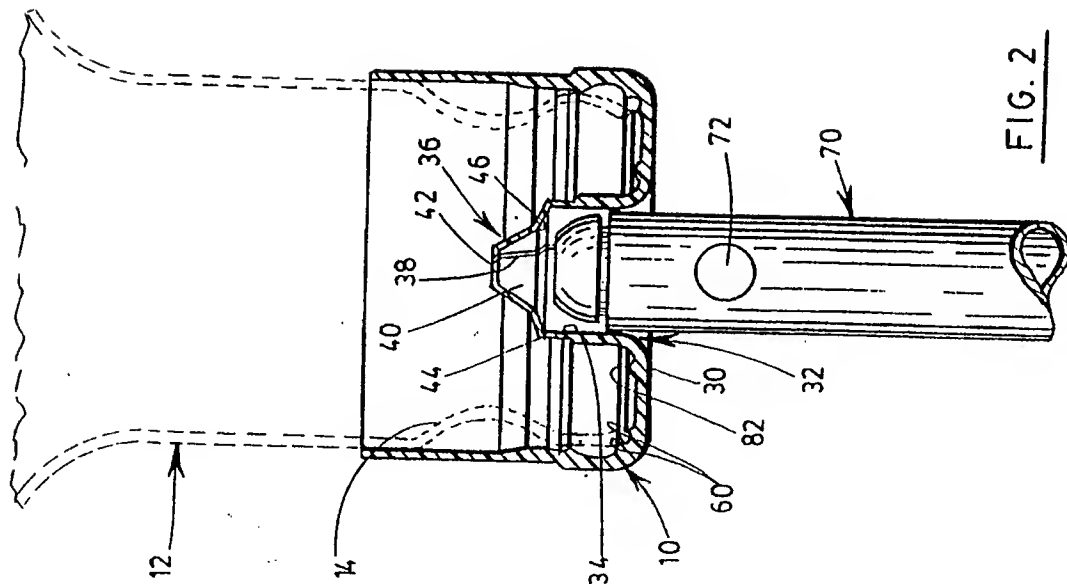

2 / 4

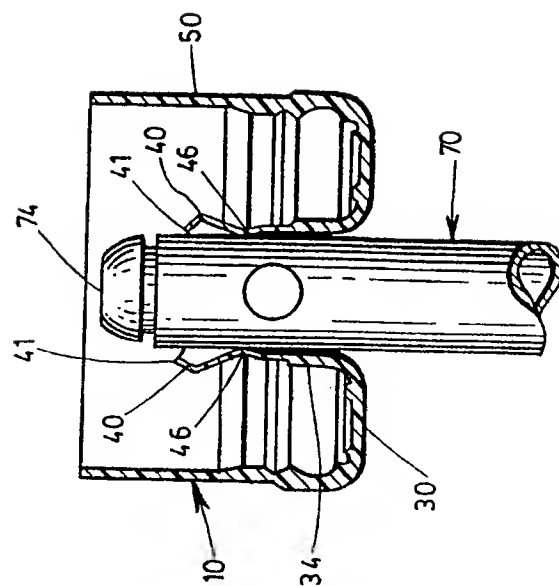


FIG. 4

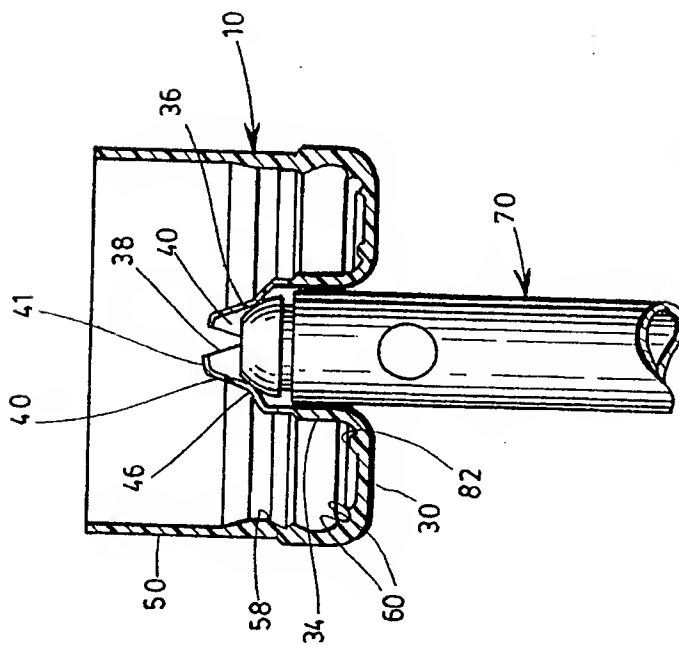


FIG. 3

3 / 4

FIG. 5


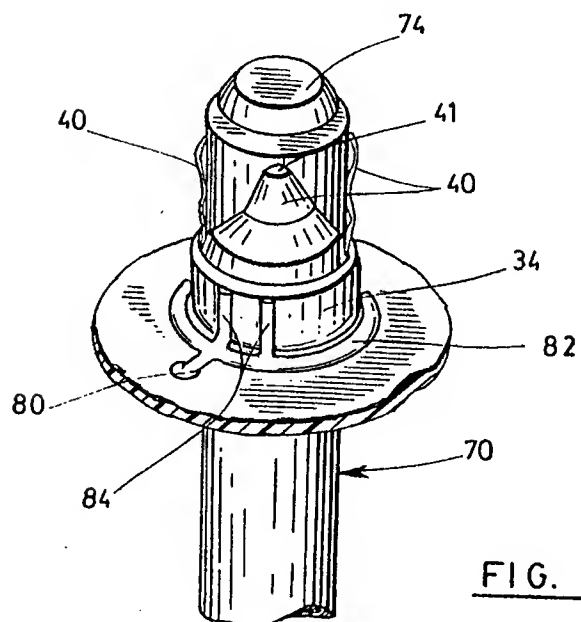


FIG. 6

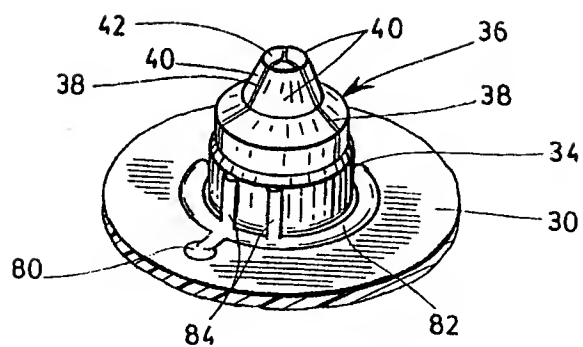

4 / 4

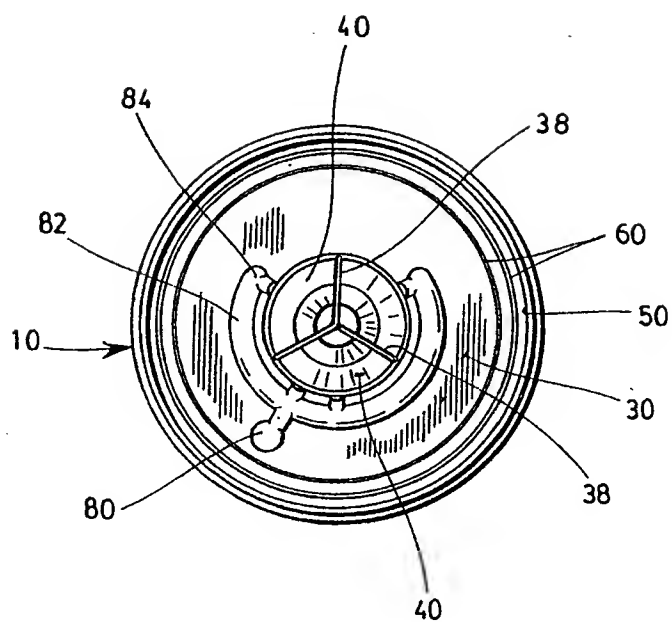


FIG. 7

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/LA 97/00392

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B67D3/00 B65D47/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B67D B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 222 530 A (BAKER HENRY E ET AL) 29 June 1993 cited in the application see claim 1; figures 2,4A-4C see column 6, line 23 - line 30 ---	1,3,7
Y	GB 1 104 638 A (BUCKLEY PAUL B ET AL) 28 February 1968 see page 1, line 35 - line 41 see page 2, line 55 - line 60 ---	1,3,7
A	WO 93 07084 A (CAP SNAP CO) 15 April 1993 ---	
A	US 5 370 270 A (ADAMS BRIAN M ET AL) 6 December 1994 cited in the application ---	
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

12 November 1997

Date of mailing of the international search report

26/11/1997

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Müller, C

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 97/00392

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 4 243 150 A (GUNNE INGEMAR ET AL) 6 January 1981</p> <p>-----</p>	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 97/00392

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5222530 A	29-06-93	US 5284188 A	08-02-94
		US 5295518 A	22-03-94
		US 5289854 A	01-03-94
		AT 116949 T	15-01-95
		AT 153618 T	15-06-97
		AU 617015 B	14-11-91
		AU 4405189 A	01-05-90
		CA 1338210 A	02-04-96
		CA 1338339 A	21-05-96
		DE 68920588 D	23-02-95
		DE 68920588 T	17-08-95
		DE 68928086 D	03-07-97
		DK 145590 A	14-06-90
		EP 0438451 A	31-07-91
		EP 0641713 A	08-03-95
		GR 1001176 B	07-06-93
		JP 6062195 B	17-08-94
		JP 3503273 T	25-07-91
		KR 9611713 B	30-08-96
		MX 172394 B	15-12-93
		PT 91978 B	09-08-95
		US 5295519 A	22-03-94
		US 5289855 A	01-03-94
		WO 9003919 A	19-04-90
		US 5121778 A	16-06-92
		US 5222531 A	29-06-93
GB 1104638 A		NONE	
WO 9307084 A	15-04-93	US 5232125 A	03-08-93
		AU 2796292 A	03-05-93
		CA 2120767 A	15-04-93
		MX 9205730 A	01-04-93
		US 5370270 A	06-12-94
		US 5513763 A	07-05-96
		US 5662231 A	02-09-97
US 5370270 A	06-12-94	US 5232125 A	03-08-93
		AU 7201794 A	03-01-95
		WO 9429215 A	22-12-94

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 97/00392

Patent document cited in search report	Publication date	Patent family members)	Publication date
US 5370270 A		AU 2796292 A CA 2120767 A MX 9205730 A WO 9307084 A US 5513763 A US 5662231 A	03-05-93 15-04-93 01-04-93 15-04-93 07-05-96 02-09-97
US 4243150 A	06-01-81	NONE	